



Product Data Sheet

DC120

Recessed mount contact - stubby press-fit

Stubby Press Fit Contact

The DC120 magnetic contact is designed specifically for applications where space is limited. The short length makes it ideal for thin framed windows and doors where longer units cannot be used. Press fit ribs on the housing make for quick and easy installation.

Installation

The hermetically-sealed reed switch is potted using exclusive polyurethane compound. Switch and Alnico V magnet is drill-mounted in wood or aluminium with a suitable adhesive. The switch and magnet housing have three fins to press-fit against the mounting hole.



Standard Features


- Switch only 19 mm long, ideal for installation in thin framed doors and windows
- With 18 mm gap distance for faster installation
- Ideal for pre-wiring, eliminates forcing switch and pre-wire into same header hole
- Available in different cable lengths
- Tamper loop provided

DC120

Recessed mount contact - stubby press-fit

Specifications

Operating gap	18 mm (max.)
Connections	4 wires, 2 m
Contact type	NC
Dimensions	
Dimensions (Ø x L)	9 x 20 mm
Colour	White

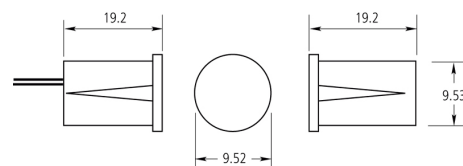

Ordering Information

Part No.	Description
DC120	Recessed mount contact - stubby press-fit
DC120S60	Recessed mount contact - stubby press-fit - 6m cable

"18mm / normalement fermé / avec nervures de blocage

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [UTC Fire & Security online](#) or contact your sales representative.

IPS-HQ-DC120-2012-02-22 15:13:14



UTC Fire & Security

A United Technologies Company