


Insulated fork terminals with easy entry

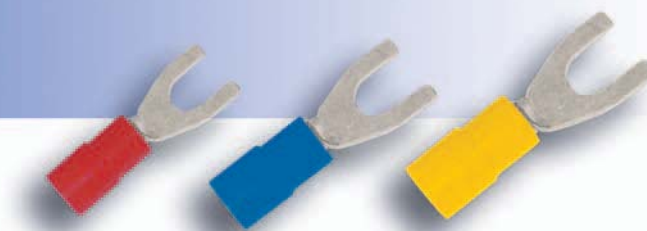

General features


- Wide range of copper terminals taking conductors from 0.5 to 6 mm².
- Colour coded insulation sleeve with “easy-entry” is fitted over the barrel.
- Electrolytic copper tube, electro tinned.
- High mechanical and dielectric resistant insulation (polyamide)
- Heat resistant up to +105°C

Compliant with **DIN 46237/C**



Tooling: see pages 148-149

Preinsulated fork terminals



Conductor section mm ²	item code	Part numbers	Stud hole mm	Dimensions mm		
				B	K	Y
0.5 - 1.5		BE1FM27D	2.5	6.0	2.7	17.0
	7212425	BE1FM32D	3.0	6.0	3.2	17.0
	7212430	BE1FM37D	3.5	6.0	3.7	17.0
		BE1FM43 *	4.0	6.4	4.3	16.8
	7212435	BE1FM43D	4.0	8.0	4.3	18.0
		BE1FM53 *	5.0	8.0	5.3	17.5
	7212440	BE1FM53D	5.0	10.0	5.3	19.0
	7212445	BE1FM65D	6.0	11.0	6.5	21.0
1.5 - 2.5	7212450	BE25FM32D	3.0	6.0	3.2	17.0
	7212455	BE25FM37D	3.5	6.0	3.7	17.0
		BE25FM43 *	4.0	6.4	4.3	17.3
	7212460	BE25FM43D	4.0	8.0	4.3	18.0
		BE25FM53 *	5.0	8.5	5.3	18.3
	7212465	BE25FM53D	5.0	10.0	5.3	20.0
	7212470	BE25FM65D	6.0	11.0	6.5	22.0
		BE25FM84D	8.0	14.0	8.4	23.0
4 - 6		BE6FM37 *	3.5	7.2	3.7	21.5
	7212475	BE6FM43D	4.0	8.0	4.3	21.0
	7212480	BE6FM53D	5.0	10.0	5.3	22.0
	7212485	BE6FM65D	6.0	11.0	6.5	23.0
	7212490	BE6FM84D	8.0	14.0	8.4	26.0

* Does not meet DIN46237/C standard

4-6MM² M5 OEILLET JAUNE PA