

LANmark Industry DIN-Rail Outlets and boxes


LANmark Industry side cover DIN-Rail mount Category 6 grey

Aginode Ref.: N20i.002

- For LANmark Industry DIN-Rail mount Cat 6 EVO (35mm)
- Easy installation, without tool
- One right and one left cover
- Suitable for one DIN-Rail mount or a row of DIN-Rail mounts

DESCRIPTION

LANmark Industry side covers for DIN-Rail Mount Cat 6 EVO. These covers can be slided on each sides of a single or a row of DIN-Rail Mount EVO Cat 6. No tools are required.

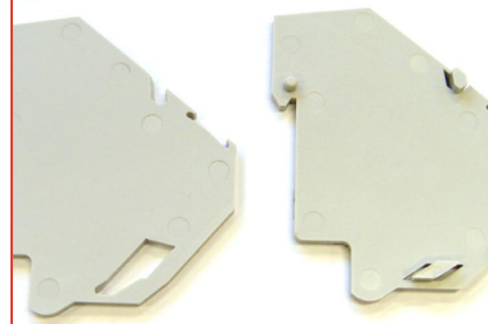

You may see a combination of brands on documents or products during the transition.

STANDARDS

International ISO/IEC 11801;
ISO/IEC 24702



Mechanical resistance to impacts
Low



Electro magnetic interference resistance
No



Minimum operating temperature
0 °C



Maximum operating temperature
70 °C



Water proof
No



RoHS compliant
Yes

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Generated 15/03/2024 www.aginode.net Page 1 / 2

LANmark Industry DIN-Rail Outlets and boxes

LANmark Industry side cover DIN-Rail mount Category 6 grey

CHARACTERISTICS

Construction characteristics

Connector type	Snap-In
Screen	No
Cable entry	From the top or the bottom
Colour	Grey
Material	ABS

Dimensional characteristics

Length cable end on inner side	0 mm
Number of cables	0
Height	77.8 mm
Width	3 mm
Depth	65 mm
Wall thickness	3 mm
Approximate weight per piece	0.02 kg
Dimensions of screw	N/A
Number of screws	0

Electrical characteristics

Maximal operating frequency	0 MHz
Characteristic impedance	0 Ohm

Mechanical characteristics

Mechanical resistance to impacts	Low
----------------------------------	-----

Usage characteristics

Component function	Cabling and Connectivity solutions
Field of application	Industrial installations
Number of ports	0
Category	N/A
Electro magnetic interference resistance	No
Packaging	Plastic bag
Minimum operating temperature	0 °C
Maximum operating temperature	70 °C
Water proof	No
RoHS compliant	Yes